


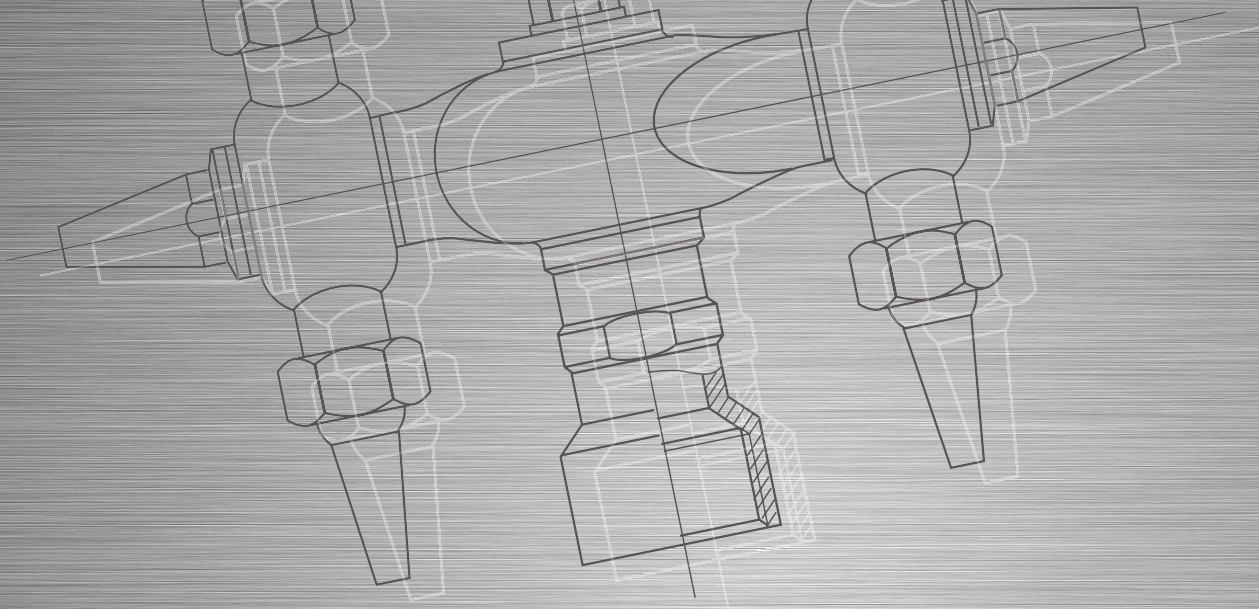


Stainless steel fittings for industry and connecting fittings

Nerūdijančio plieno uždaromoji armatūra
pramonei ir jungiamosios dalys

Type female strainer (AISI 304)


Mechaninis filtras srieginis Y

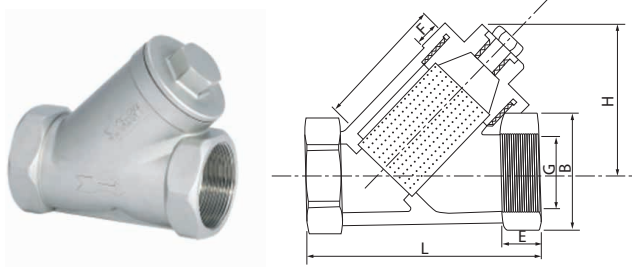

DN	G	L	E	B	H
8	1/4"	64	12	24	44
10	3/8"	64	12	24	44
15	1/2"	64	14	26	44
20	3/4"	75	15	32	52
25	1"	89	17	41	64
32	1 1/4"	102	20	49	68
40	1 1/2"	118	20	56	76
50	2"	139	22	69	88

Female swing check valve (AISI 304)

Pasukamas atbulinis vožtuvas

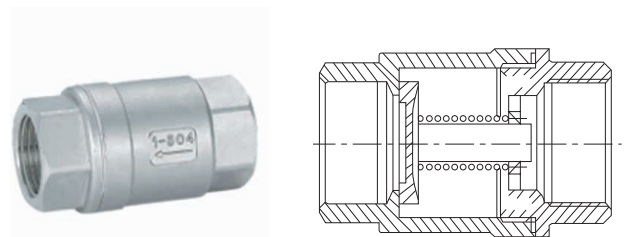

DN	G	L	E	B	H
8	1/4"	64	10	24	42
10	3/8"	64	10	24	42
15	1/2"	64	12	26	45
20	3/4"	80	17	32	53
25	1"	90	20	41	60
32	1 1/4"	105	20	51	64
40	1 1/2"	120	20	58	76
50	2"	140	23	69	82
65	2 1/2"	165	27	86	89

3-PCS Type welded ball valve (AISI 304)


Rutulinis ventilis 3-ių dalių (virinamas)



DN	G	L	H	W
8	1/4"	65	52	90
10	3/8"	65	52	90
15	1/2"	70/61	65	100
20	3/4"	80/69	70	120
25	1"	90/80	78	140
32	1 1/4"	110/96	82	140
40	1 1/2"	120/104	90	180
50	2"	140/125	98	200
65	2 1/2"	160	140	220
80	3"	180	155	240
100	4"	215	122	300


3-PCS Type threaded ball valve (AISI 304)

Rutulinis ventilis 3-ių dalių (srieginis)

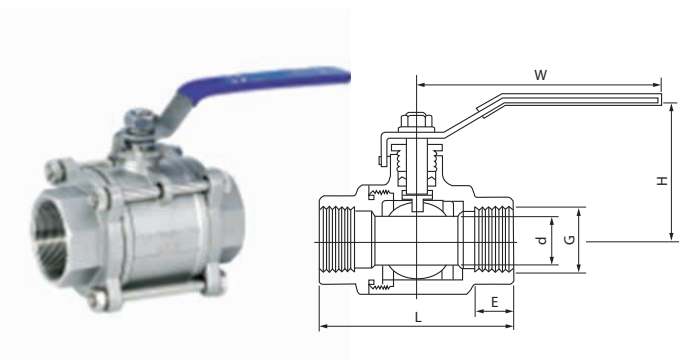


DN	G	d	L	H	W
8	1/4"	10	65	50	90
10	3/8"	12	65	50	90
15	1/2"	15	70/75/61	55	100
20	3/4"	20	80/80/69	60	120
25	1"	25	90/90/80	70	140
32	1 1/4"	32	110/110/96	82	140
40	1 1/2"	38	120/120/104	90	180
50	2"	50	140/140/125	105	200
65	2 1/2"	64	160/185	120	220
80	3"	78	180/205	132	240
100	4"	100	215/240	160	300

Threated butterfly valve (AISI 304) Srieginė peteliškinė sklendė (AISI 304)




Size	DN	D	L	L1	H	G	KXK
DN10	DN11	74	68	130	86	RD28x1/8	8x8
DN15	15	74	68	130	86	RD34x1/8	8x8
DN20	19	74	68	130	86	RD44x1/6	8x8
DN25	25	74	68	130	86	RD52x1/6	8x8
DN32	31	80	68	130	90	RD58x1/6	8x8
DN40	37	87	68	130	92	RD65x1/6	8x8
DN50	49	107	76	130	104	RD78x1/6	8x8
DN65	66	124	80	160	113	RD95x1/6	10x10
DN80	81	139	82	160	123.5	RD110x1/4	10x10
DN100	100	159	88	160	133.5	RD130x1/4	10x10
DN125	125	190	128	200	146.5	RD160x1/4	12x12
DN150	150	220	146	200	161.5	RD190x1/4	12x12

2-PCS Type threaded ball valve (AISI 304) Rutulinis ventilis 2-ių dalių (srieginis)

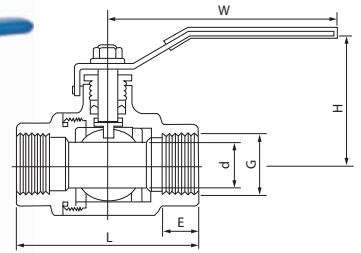


DN	G	d	L	E	H	W
8	1/4"	10	57	14	58	80
10	3/8"	12	57	14	58	80
15	1/2"	15	57	14	58	90/80
20	3/4"	20	65	15	62	110/90
25	1"	25	76/79	15	72	120/110
32	1 1/4"	32	88/90	18	80	130/120
40	1 1/2"	38	97/98	19	90	150/130
50	2"	50	118/116	19	98	170/150

Welded butterfly valve (AISI 304) Virinama peteliškinė sklendė (AISI 304)



Size	DN		D	L	L1	H	T	KXK
	1	2						
DN10	12	13	74	50	130	86	1.5	8X8
DN15	18	19	74	50	130	86	1.5	8X8
DN20	22	23	74	50	130	86	1.5	8X8
DN25	28	29	74	50	130	86	1.5	8X8
DN32	34	35	80	50	130	90	1.5	8X8
DN40	40	41	87	50	130	92	1.5	8X8
DN50	52	53	107	50	130	104	1.5	8X8
DN65	70	-	124	56	160	113	2.0	10X10
DN80	85	-	139	56	160	123.5	2.0	10X10
DN100	104	-	159	64	160	133.5	2.0	10X10
DN125	129	-	190	74	160	146.5	2.0	12X12
DN150	154	-	220	80	200	161.5	2.0	12X12
DN200	204	-	290	88	250	199	2.0	14X14


Flanged ball valve with high mounting pad (fire safe) (AISI 304) Flanšinis rutulinis ventilis 2d.



INCH	DN	H	L	D	K	D1	C	N-CD	W
1/2"	15	76	108	89/95	60.5/70	35/52	10/12	4-15	130
3/4"	20	83	117	98/100	70/75	43/58	11/14	4-15	130
1"	25	87	127	108/125	79.5/90	51/70	12/14	4-15/4-19	130
1 1/4"	32	92	140	117/135	89/100	64/80	13/16	4-15/4-19	160
1 1/2"	40	108	165	127/140	98.5/105	73/85	14.5/16	4-15/4-19	200
2"	50	115	178	152/155	120.5/120	92/100	16	4-19	200
2 1/2"	65	137	190	178/175	139.5/140	105/120	17.5/18	4-19	240
3"	80	150	203	190/185	152.5/150	127/130	19/18	4-19/8-19	290
4"	100	179	229	229/210	190.5/175	157/155	24/18	8-19	330
5"	125	250	356	254/250	216/210	185/185	24/20	8-22/8-23	600
6"	150	270	394	279/280	241.3/240	216/215	25.4/22	8-22/8-23	600
8"	200	320	457	343/330	298.5/290	270/265	29/22	8-22/12-23	800
10"	250	340	533	406	362	324	30.5	12-25	1000
12"	300	370	610	483	431.8	381	31.8	12-25	1200

Rotary cleaning ball threaded (AISI 316)


Rotacinė plovimo galvutė su sriegiu



Size	A	H	Pressure (bar)	Cleaning radius (m)	Fluxation m3/h
1"	118.0	165.0	1.5-2.0	2.0-3.0	23
1 1/4"	142.0	189.0	1.8-2.5	2.5-3.0	38
2"	145.0	191.0	2.5-3.0	3.5-4.0	60

Rotary cleaning ball bolted (AISI 316)


Rotacinė plovimo galvutė su varžtais



Size	A	H	Pressure (bar)	Cleaning radius (m)	Fluxation m3/h
1"	118.0	175.0	1.5-2.0	2.0-3.0	23
1 1/4"	142.0	200.0	1.8-2.5	2.5-3.0	38
2"	145.0	205.0	2.5-3.0	3.5-4.0	60

Fixed cleaning ball treaded and clamped (AISI 316)

Plovimo galva srieginė ir užspaudžiama

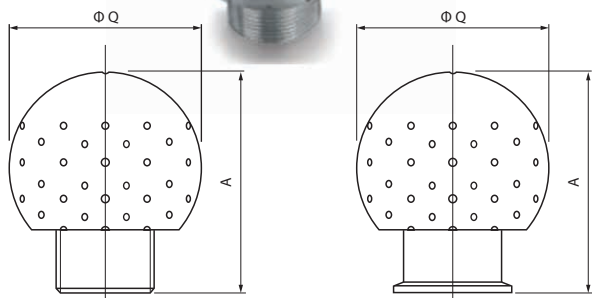


Size	A	Q	Size	A	Q
1"	72.0	63.0	1"	80.0	63.0
1 1/4"	85.0	76.0	1 1/4"	93.0	76.0
1 1/2"	87.0	76.0	1 1/2"	93.0	76.0
2"	102.0	91.0	2"	108.0	91.0
			2 1/2"	115.0	100.0

Size	Pressure (bar)	Cleaning radius (m)	360°/180° Fluxation m3/h	Size	Pressure (bar)	Cleaning radius (m)	360°/180° Fluxation m3/h
1"	72.0	63.0	63.0	1"	2.5	1.0-1.25	17/10
1 1/4"	85.0	76.0	76.0	1 1/4"~1 1/2"	2.5	1.25-1.75	23/17
1 1/2"	87.0	76.0	76.0	2"	3.5	2.0-3.0	55/38
2"	102.0	91.0	91.0	2 1/2"	3.5	3.0-3.5	58/41

Fixed cleaning ball welded and bolted (AISI 316)


Plovimo galva virinama ir su varžtais

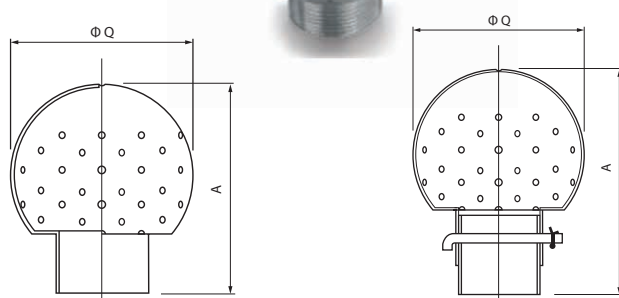

Size	A	Q	Size	A	Q
1"	72.0	53.0	1"	95.0	63.0
1 1/2"	85.0	63.0	1 1/2"	110.0	76.0
2"	87.0	91.0	2"	125.0	91.0
2 1/2"	102.0	100.0	2 1/2"	135.0	100.0



Size	Pressure (bar)	Cleaning radius (m)	360°/180° Fluxation m3/h	Size	Pressure (bar)	Cleaning radius (m)	360°/180° Fluxation m3/h
1"	2.5	1.0-1.25	17/10	1"	2.5	1.0-1.25	17/10
1 1/4"~1 1/2"	2.5	1.25-1.75	23/17	1 1/4"~1 1/2"	2.5	1.25-1.75	23/17
2"	3.5	2.0-3.0	55/38	2"	3.5	2.0-3.0	55/38
2 1/2"	3.5	3.0-3.5	58/41	2 1/2"	3.5	3.0-3.5	58/41

Square man hole cover (AISI 304) Kvadratinis dangtis




XX	HI	LI	L2	T
425*335	65.0	425	335	8.0
535*435	65.0	535	435	8.0
Φ300	100	300	294	294

Round man hole cover (AISI 304) Apvalus dangtis




XX	H1	D1	D2
Φ200	100	200	194
Φ220	100	220	214
Φ300	100	300	294
Φ350	100	350	344
Φ400	100	400	394
Φ430	100	430	424
Φ450	100	450	444
Φ500	100	500	494
Φ600	100	600	594

Welded sight glass (AISI 304) Apžiūros stiklas privirinamas



Size	H	D	D1	Dn
DN10	140	78	13	13
DN15	140	78	18	18
DN20	140	78	22	22
DN25	140	78	28	28
DN32	140	86	34	34
DN40	140	90	40	40
DN50	142	102	52	52
DN65	146	124	70	70
DN80	150	139	85	85
DN100	154	154	104	104
DN125	170	185	129	129
DN150	180	215	154	154

Welded check valve (AISI 304) Atbulinis vožtuvas privirinamas




SIZE	H	D1		D	t
		1	1		
1"	118.0	165.0	1.5-2.0	2.0-3.0	23
1/4 1 1/2	142.0	189.0	1.8-2.5	2.5-3.0	38
2"	145.0	191.0	2.5-3.0	3.5-4.0	60
1"	118.0	165.0	1.5-2.0	2.0-3.0	23
1/4 1 1/2	142.0	189.0	1.8-2.5	2.5-3.0	38
2"	145.0	191.0	2.5-3.0	3.5-4.0	60
1"	118.0	165.0	1.5-2.0	2.0-3.0	23
1/4 1 1/2	142.0	189.0	1.8-2.5	2.5-3.0	38
2"	145.0	191.0	2.5-3.0	3.5-4.0	60

SIZE	H	D1	D
3/4"	74	19	72
1"	74	25.4	72
1 1/4"	74	31.8	87
1" 1/2	74	38.1	87
2"	79	50.8	100
1" 1/2	99	63.5	115
3"	107	76.2	128
3/4"	109	89	128
4"	123	101.6	164

DIN Round nut (AISI 304)


DIN Jungties veržlė



Size	D	G	H
DN10	38	Rd28 x 1/8	18
DN15	44	Rd34 x 1/8	18
DN20	54	Rd44 x 1/6	20
DN25	62	Rd52 x 1/6	21
DN32	68	Rd58 x 1/6	21
DN40	78	Rd65 x 1/6	21
DN50	91	Rd78 x 1/6	22
DN65	110	Rd95 x 1/6	25
DN80	126	Rd110 x 1/4	27
DN100	146	Rd130 x 1/4	29
DN125	178	Rd160 x 1/4	32
DN150	210	Rd191 x 1/4	38

Counling clamp (AISI 304)


Vamzdžio spaustuvas



Size	D	L
2"	57.4	125.5
2 1/2"	69.6	143.5
3"	85.2	162
4"	110	192
6"	165	281
8"	215.2	330

DIN welding male part (AISI 304)


DIN jungties sriegis



Size	FD	G	H
DN10	13	Rd28 x 1/8	19
	14		
DN15	19	Rd34 x 1/8	19
	20		
DN20	23	Rd44 x 1/6	21
	24		
DN25	29	Rd52 x 1/6	26
	30		
DN32	35	Rd58 x 1/6	25
	36		
DN40	41	Rd65 x 1/6	31
	42		
DN50	53	Rd78 x 1/6	31
	54		
DN65	70	Rd95 x 1/6	36
DN80	85	Rd110 x 1/4	42
DN100	104	Rd130 x 1/4	50

DIN liner (AISI 304)


DIN Jungties kūgis



Size	A	H	Pressure (bar)
DN10	13	22	17
	14		
DN15	19	28	17
	20		
DN20	23	36	18
	24		
DN25	29	43	22
	30		
DN32	35	49	25
	36		
DN40	41	55	26
	42		
DN50	53	67	30
	54		
DN65	70	85	34
DN80	85	99	38
DN100	104	119	46

Double pin clamp (AISI 304)


Dvigubas vamzdžių spaustuvas

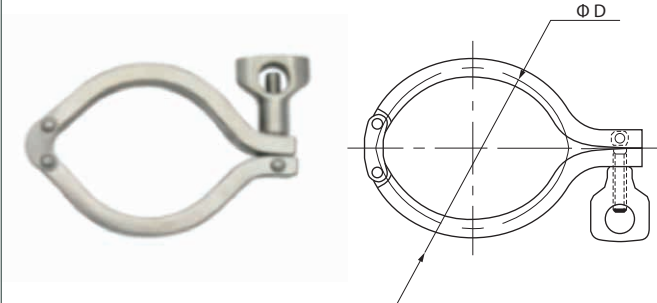

Size	D
1/2"~3/4"	28.6
1"~1 1/2"	53.9
2"	67.4
2 1/2"	80.9
3"	94.4
4"	122.4
6"	170.4
8"	221.2

3-Pcs clamp (AISI 304)


Trigubas vamzdžių spaustuvas

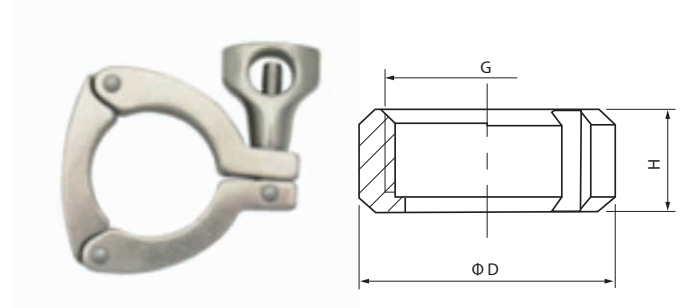

Size	D
1"~1 1/2"	53.9
2"	67.4
2 1/2"	80.9
3"	94.4
4"	122.4

Double pin clamp (AISI 304)


Dvigubas vamzdžių spaustuvas

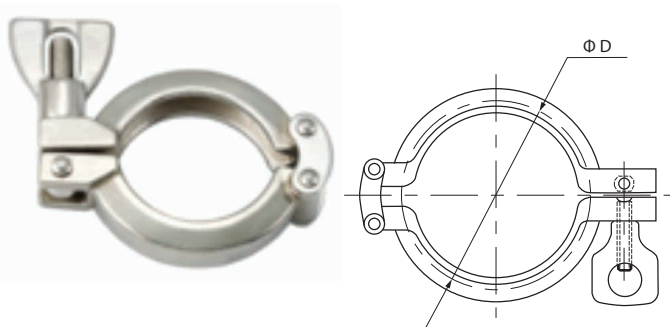

Size	D
1/2"~3/4"	28.6
1"~1 1/2"	53.9
2"	67.4
2 1/2"	80.9
3"	94.4
4"	122.4
6"	170.4
8"	221.2

Heavy duty clamp (AISI 304)


Sunkios apkrovos vamzdžių spaustuvas

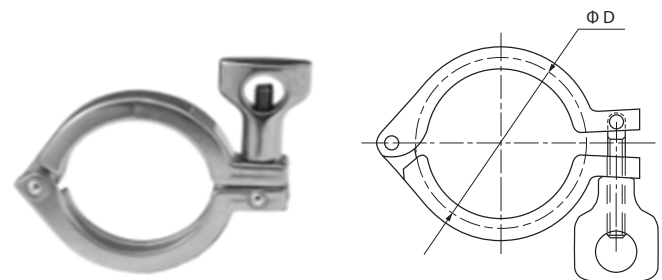

Size	D
1/2"~3/4"	28.6
1 "~1 1/2"	53.9
2"	67.4
2 1/2"	80.9
3"	94.4
4"	122.4
4 1/2"	134
5"	149
Φ133	159
6"	170.4
Φ159	187
8"	221.2
Φ219	238
10"	272
12"	323

DIN heavy duty clamp (AISI 304)


DIN sunkios apkrovos vamzdžių spaustuvas

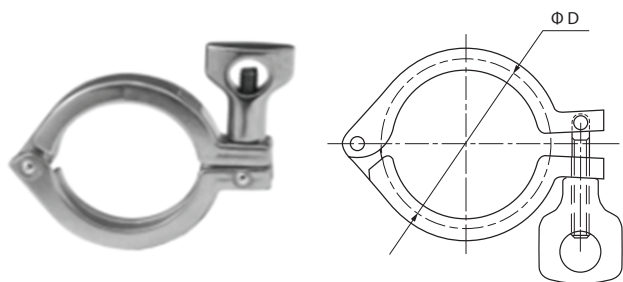

Size	D
DN10-20	37
DN25-40	53
DN50	67
DN65	94
DN80	109
DN100	122
DN125	149
DN125	159
DN150	171
DN150	187
DN200	217
DN200	238
DN250	272
DN300	323

Pipe holder (AISI 304)



Vamzdžio laikiklis

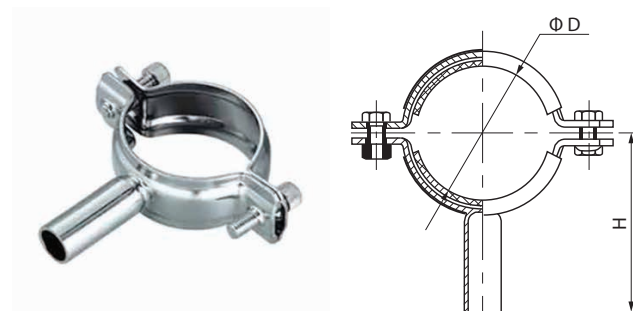

Size	D	H
1/2"	12.7	90
3/4"	19.1	90
1"	25.4	90
1 1/2"	38.1	90
2"	50.8	90
2 1/2"	63.5	90
3"	76.2	90
4"	101.6	90
5"	129	117.5
6"	154	130
8"	204	155
10"	254	180
12"	304	205

Pipe holder (AISI 304)


Vamzdžio laikiklis



Size	D	H
1/2"	12.7	90
3/4"	19.1	90
1"	25.4	90
1 1/2"	38.1	90
2"	50.8	90
2 1/2"	63.5	90
3"	76.2	90
4"	101.6	90
5"	129	125
6"	154	135
8"	204	145
10"	254	174
12"	304	200

3A Welded elbow 90° with straight end (AISI 304)


3A Alkūnė privirinama 90°

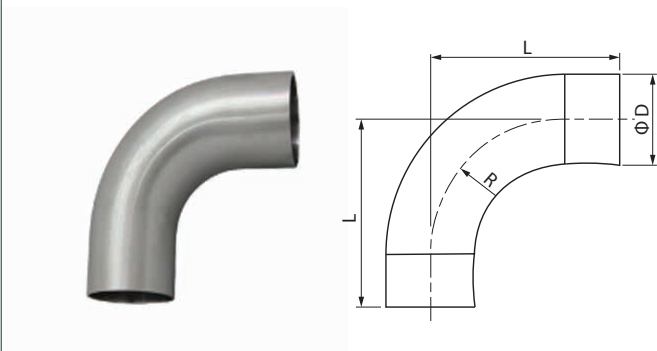

Size	D	L	R
1/2"	12.7	38	19.1
3/4"	19.1	38	28.5
1"	25.4	52.4	38.1
1 1/4"	31.8	69.7	47.7
1 1/2"	38.1	74.6	57.2
2"	50.8	103.2	76.2
2 1/2"	63.5	131.8	95.3
3"	76.2	160.3	114.3
4"	101.6	211.1	152.4
6"	152.4	280	228.6

3A Welded elbow 45° with straight end (AISI 304)


3A Alkūnė privirinama 45°

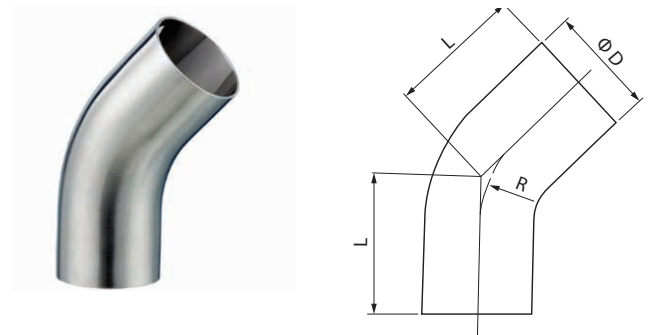

Size	D	L	R
1/2"	12.7	19.3	19.1
3/4"	19.1	19.3	28.5
1"	25.4	30.1	38.1
1 1/4"	31.8	41.3	47.7
1 1/2"	38.1	41.3	57.2
2"	50.8	58.8	76.2
2 1/2"	63.5	76.2	95.3
3"	76.2	93.7	114.3
4"	101.6	122.2	152.4
6"	152.4	158.8	228.6

Short – type welded tee (AISI 304)


Trumpas trišakis privirinamas

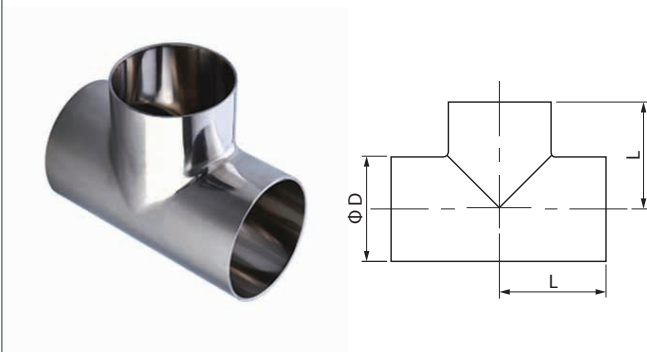

Size	D	L
1/2"	12.7	38
3/4"	19.1	38
1"	25.4	28.5
1 1/4"	31.8	35
1 1/2"	38.1	42
2"	50.8	52.3
2 1/2"	63.5	59.5
3"	76.2	65.9
4"	101.6	87.4
6"	152.4	127

3A Welded cross (AISI 304)


3A Keturšakis privirinamas

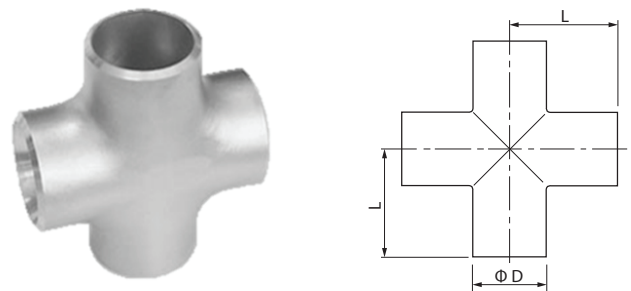

Size	D	L
1"	25.4	47.6
1 1/4"	31.8	55.0
1 1/2"	38.1	57.2
2"	50.5	76.2
2 1/2"	63.5	76.2
3"	76.2	82.6
4"	101.6	98.4

Long – type welded tee (AISI 304)


Ilgas trišakis privirinamas

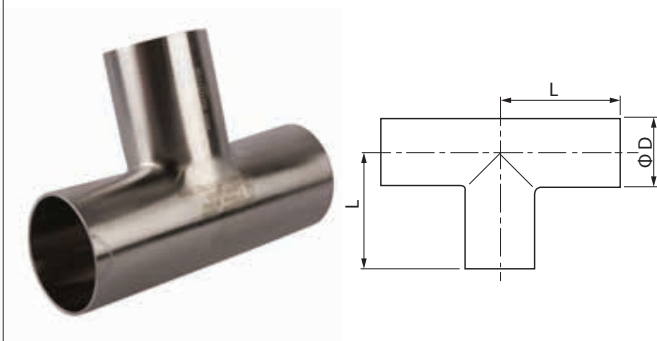

Size	D	L
1/2"	12.7	38
3/4"	19.1	38
1"	25.4	47.6
1 1/4"	31.8	55
1 1/2"	38.1	57.2
2"	50.8	76.2
2 1/2"	63.5	76.2
3"	76.2	82.6
4"	101.6	98.4
6"	152.4	127

DIN Welded elbow 90° with straight end (AISI 304)


DIN privirinama alkūnė 90°

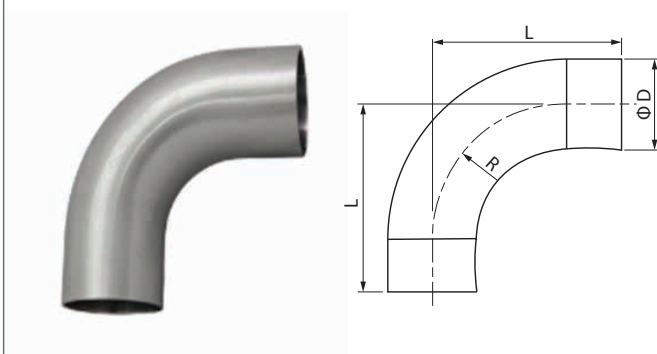

Size	D	L	R
DN10	12	40	26
DN15	18	47	35
DN20	22	52	40
DN25	28	70	50
DN32	34	78	55
DN40	40	85	60
DN50	52	97	70
DN65	70	110	80
DN80	85	118	90
DN100	104	140	100
DN125	129	227	187
DN150	154	265	225

3A Concentric and Eccentric welded reducer (AISI 304)


3A Koncentrinis is ekscentrinis perėjimas privirinamas

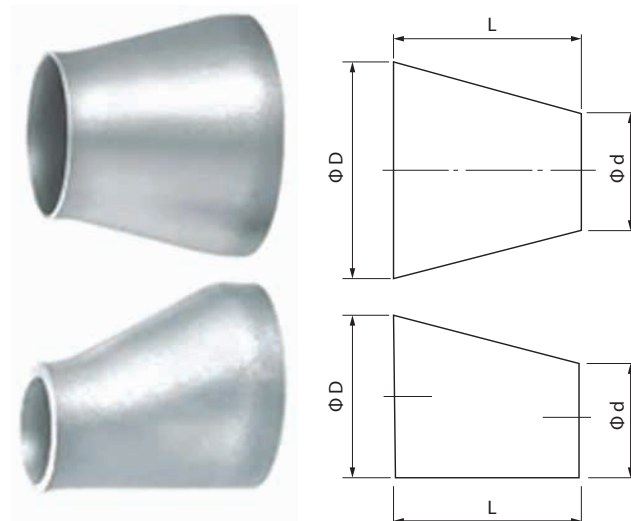

Size	D	d	L
3/4"-1/2"	19.1	12.7	25.4
1"-1/2"	25.4	12.7	38.1
1"-3/4"	25.4	19.1	25.4
1 1/2"-1/2"	38.1	12.7	63.5
1 1/2"-3/4"	38.1	19.1	50.8
1 1/2"-1"	38.1	25.4	50.8
2"-1/2"	50.8	12.7	114.3
2"-3/4"	50.8	19.1	101.6
2"-1"	50.8	25.4	101.6
2"-1 1/2"	50.8	38.1	50.8
2 1/2"-1/2"	63.5	12.7	165
2 1/2"-3/4"	63.5	19.1	152.4
2 1/2"-1"	63.5	25.4	152.4
2 1/2"-1 1/2"	63.5	38.1	101.6
2 1/2"-2"	63.5	50.8	50.8
3"-1"	76.2	25.4	203.2
3"-1 1/2"	76.2	38.1	152.4
3"-2"	76.2	50.8	101.6
3"-2 1/2"	76.2	63.5	50.8
4"-1"	101.6	25.4	304.9
4"-1 1/2"	101.6	38.1	254
4"-2"	101.6	50.8	203.2
4"-2 1/2"	101.6	63.5	152.4
4"-3"	101.6	76.2	101.6
6"-3"	152.4	76.2	155.7
6"-4"	152.4	101.6	155.7

DIN Welded elbow 45° (AISI 304)


DIN privirinama alkūnē 45°



Size	D	L	R
DN10	12	10.7	26
DN15	18	14.5	35
DN20	22	16.5	40
DN25	28	20.7	50
DN32	34	22.8	55
DN40	40	24.8	60
DN50	52	29	70
DN65	70	33.2	80
DN80	85	37.3	90
DN100	104	41.5	100
DN125	129	77.5	187
DN150	154	93.2	225

DIN Welded elbow 180° (AISI 304)


DIN privirinama alkūnē 180°



Size	D	L	R
DN15	18	70	35
DN20	22	80	40
DN25	28	100	50
DN32	34	110	55
DN40	40	120	60
DN50	52	140	70
DN65	70	160	80
DN80	85	180	90
DN100	104	200	100
DN100	104	100	100
DN125	129	187	187
DN200	204	300	300

DIN Welded tee (AISI 304)


DIN privirinamas trišakis



Size	D	L
DN10	12	26
DN15	18	35
DN20	22	40
DN25	28	50
DN32	34	55
DN40	40	60
DN50	52	70
DN65	70	80
DN80	85	90
DN100	104	100
DN125	129	187
DN150	154	225

DIN Welded elbow 90° (AISI 304)


DIN privirinama alkūnē 90°



Size	D	L	R
DN10	12	26	26
DN15	18	35	35
DN20	22	40	40
DN25	28	50	50
DN32	34	55	55
DN40	40	60	60
DN50	52	70	70
DN65	70	80	80
DN80	85	90	90
DN100	104	100	100
DN125	129	187	187
DN150	154	225	225
DN200	204	300	300

3A Welded elbow 90° (AISI 304)


3A privirinama alkūnē 90°

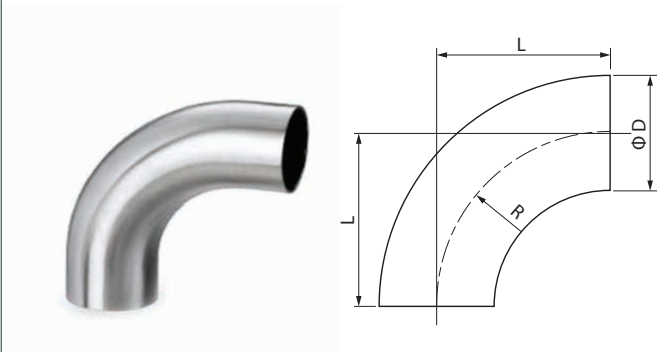

Size	D	L	R
1/2"	12.7	19.1	19.1
3/4"	19.1	28.5	28.5
1"	25.4	38.1	38.1
1 1/4"	31.8	47.7	47.7
1 1/2"	38.1	57.2	57.2
2"	50.8	76.2	76.2
2 1/2"	63.5	95.3	95.3
3"	76.2	114.3	114.3
4"	101.6	152.4	152.4
6"	152.4	228.6	228.6

3A Welded elbow 180° (AISI 304)


3A Privirinama alkūnē 180°

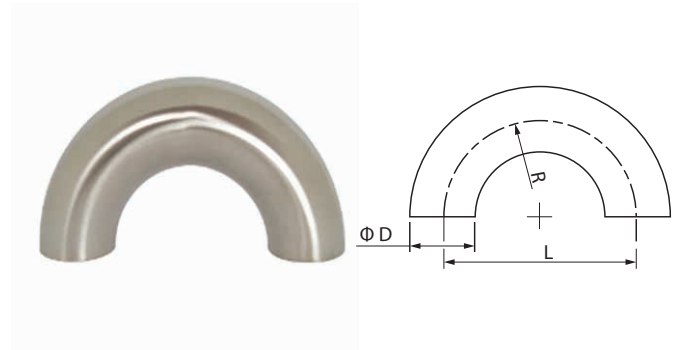

Size	D	L	R
1/2"	25.4	76.2	38.1
3/4"	38.1	114.3	57.2
2"	50.8	152.4	76.2
2 1/2"	63.5	190.5	95.3
3"	76.2	228.6	114.3
4"	101.6	304.8	152.4

3A Welded elbow 45° (AISI 304)


3A privirinama alkūnē 45°

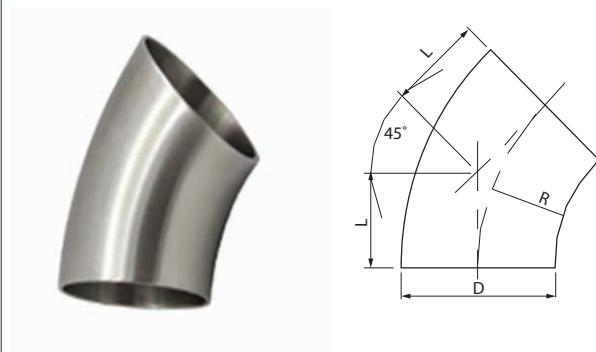

Size	D	L	R
1/2"	12.7	7.9	19.1
3/4"	19a.1	11.8	28.5
1"	25.4	15.8	38.1
1 1/4"	31.8	19.8	47.7
1 1/2"	38.1	23.8	57.2
2"	50.8	31.8	76.2
2 1/2"	63.5	39.7	95.3
3"	76.2	47.6	114.3
4"	101.6	63.5	152.4
6"	152.4	94.7	228.6

DIN Welded cross (AISI 304)


DIN privirinamas keturšakis

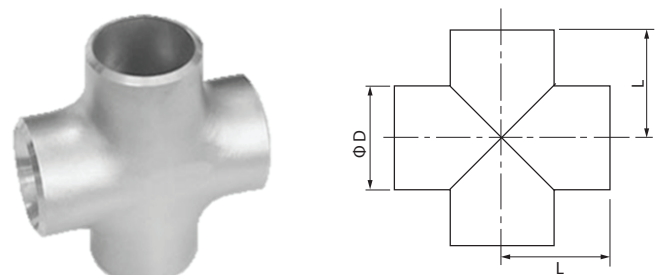

Size	D	L
DN10	12	26
DN15	18	35
DN20	22	40
DN25	28	50
DN32	34	55
DN40	40	60
DN50	52	70
DN65	70	80
DN80	85	90
DN100	104	100
DN125	129	187
DN150	154	225


DIN Welded reducer (AISI 304)

DIN koncentrinis ir ekscentrinis privirinamas perėjimas

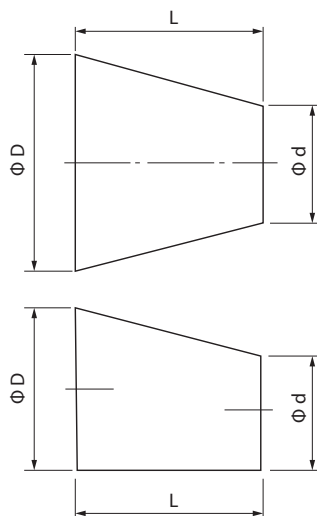

Size	D	d	L	Size	D	d	L
DN15-DN10	18	13	11	DN65-DN32	70	34	62
DN20-DN10	22	13	18	DN65-DN40	70	40	51
DN20-DN15	22	18	7	DN65-DN50	70	52	29
DN25-DN15	28	18	18	DN80-DN40	85	40	78
DN25-DN20	28	22	11	DN80-DN50	85	52	56
DN32-DN20	34	22	22	DN80-DN65	85	70	27
DN32-DN25	34	28	11	DN100-DN50	104	52	90
DN40-DN20	40	22	33	DN100-DN65	104	70	61
DN40-DN25	40	28	22	DN100-DN80	104	85	34
DN40-DN32	40	34	11	DN125-DN80	129	85	80
DN50-DN25	52	28	44	DN125-DN100	129	104	45
DN50-DN32	52	34	33	DN150-DN100	154	104	90
DN50-DN40	52	40	22	DN150-DN125	154	129	45
DN65-DN25	70	28	73	DN200-DN150	204	154	90

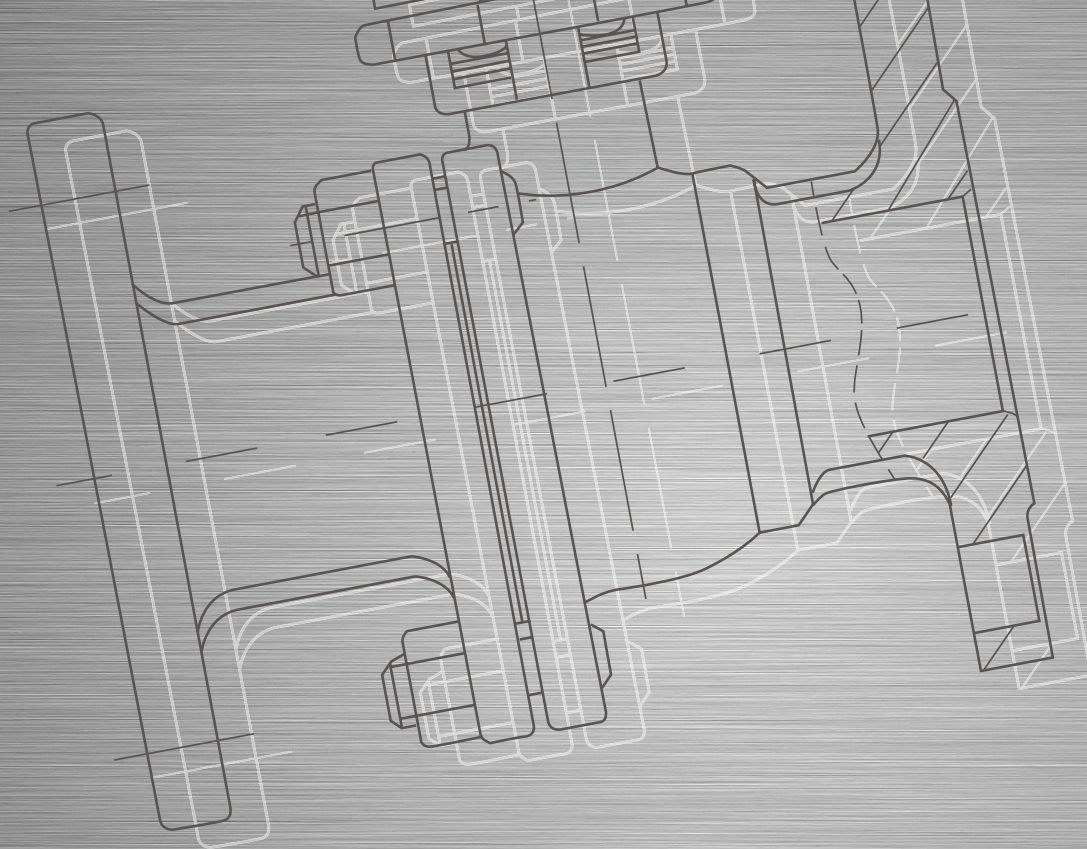

**Biuras Kaune**

UAB "MV Steel group",
Nemajūnų g. 19B, LT-52449 Kaunas, Lietuva
Telefonas: +370 37 328200,
Faksas: +370 37 261878
El. paštas: andrius@mvsteelgroup.lt

Biuras Vilniuje

UAB "MV Steel group",
Titnago g. 12, LT-02300 Vilnius, Lietuva
Telefonai: Mob: +370 662 37516,
+370 682 31904, +370 620 10903
El. paštas: arturas@mvsteelgroup.lt,
edvinas@mvsteelgroup.lt,
edvinas.z@mvsteelgroup.lt

Biuras Taline

Laevastiku 3s, Pohja-Tallinna linnaosa,
Tallinn, Harjumaa, 10313.
Telefonas: +372 527 2916
El. paštas: vadim@mvsteelgroup.lt,
edvinas@mvsteelgroup.lt